

## DESCRIPTION

The AtLite Emergency Light SELM series is a UL924 code compliant solution designed to run for a minimum of 90 minutes during a power outage. Key features of the series include: a nickel cadmium battery capable of providing up to 16 watts of remote capacity, steel housing and aluminum heads, long life and maintenance free LED source with proprietary accuLED optics, as well as self-diagnostics that perform NFPA required monthly testing. This series is fully compatible with SRP/SRM/SRPA LED remotes. The **patented** external battery disconnect and easy hang features reduce installation time and cost. The SEL series is designed for indoor commercial or industrial use.

|                    |  |             |
|--------------------|--|-------------|
| <b>Catalog #</b>   |  | <b>Type</b> |
| <b>Project</b>     |  |             |
| <b>Comments</b>    |  | <b>Date</b> |
| <b>Prepared by</b> |  |             |

## SPECIFICATION FEATURES

### ELECTRICAL

- Universal voltage input 120V to 277V, 60Hz
- Provides 6V remote capacity of 10 watts - 16 watts (see remote system design guidelines)
- EZ Key external battery disconnect
- Battery back-up
- Minimum 90-minute runtime
- LED source with 300 lumens of output (SELM60R10SD version)
- Brownout circuit
- Low-Voltage disconnect
- Overload / Short circuit protection
- Self-diagnostics
- Laser test capability

### HOUSING CONSTRUCTION

- 20 gauge sheet metal housing
- White textured finish
- Universal J-box mounting pattern
- Keyhole mounting slots
- Knockouts for conduit entry
- Suitable for ceiling, pendant, or wall mount applications

### BATTERY

- Sealed nickel cadmium
- Full recharge time 24 hours
- 0 °C to 40 °C (32 °F to 104 °F)

### WARRANTY

- Five-year fixture warranty
- Prorated seven-year battery warranty

### CODE COMPLIANCE



- UL924 Listed
- Damp Location
- Life Safety NFPA 101
- NEC/OSHA
- Most State & Local Codes
- City of Chicago Compliant
- NYC Compliant
- California Energy Code Compliant



**SELM SERIES**

## LED Emergency Light


**Emergency Light  
Metal Housing  
Adjustable Head  
Remote Capacity**



## HOW TO SPECIFY

AtLite LED emergency light with nickel cadmium battery and remote capacity, EZ Key external battery disconnect, EZ Hang installation, adjustable optics, 300 lumens of output per head (SELM60R10SD version), sheet metal housing with self-diagnostics, and up to 16 watts of remote capacity.

## DIMENSIONS

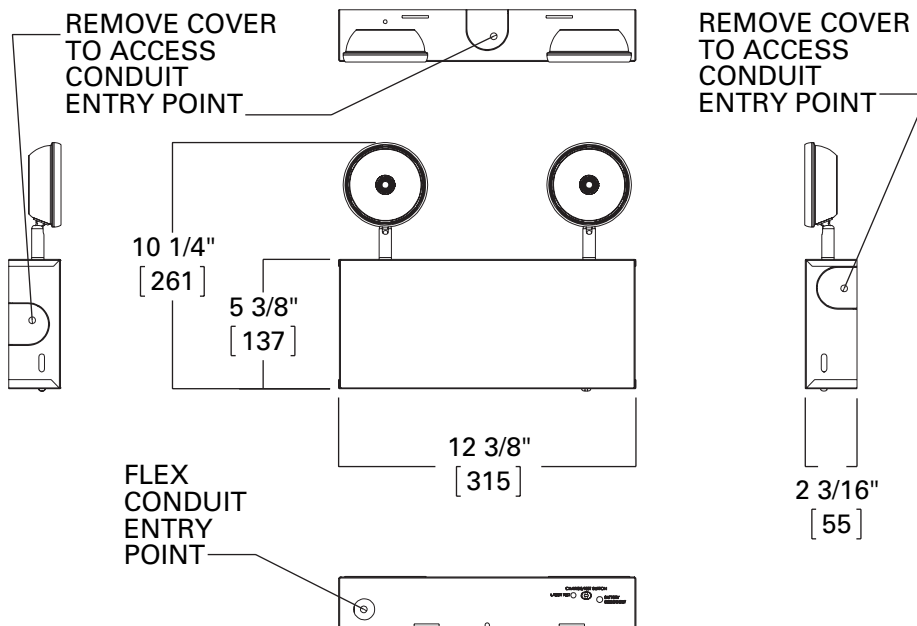

## ENERGY DATA

|             | Input Power | Current |
|-------------|-------------|---------|
| 120V - 277V | 5.1 W       | 0.8 A   |

## ORDERING INFORMATION

SAMPLE NUMBER: SELM25R16SD

| Series                     | Housing         | Spacing      | Remote Capacity | Self Diagnostics                 |
|----------------------------|-----------------|--------------|-----------------|----------------------------------|
| SELM = LED Emergency Light | M = Sheet Metal | 25 = 25 Feet | R16 = 16 Watts  | SD = Self Diagnostics (Standard) |

SAMPLE NUMBER: SELM50R14SD

| Series                     | Housing         | Spacing      | Remote Capacity | Self Diagnostics                 |
|----------------------------|-----------------|--------------|-----------------|----------------------------------|
| SELM = LED Emergency Light | M = Sheet Metal | 50 = 50 Feet | R14 = 14 Watts  | SD = Self Diagnostics (Standard) |

SAMPLE NUMBER: SELM60R10SD

| Series                     | Housing         | Spacing      | Remote Capacity | Self Diagnostics                 |
|----------------------------|-----------------|--------------|-----------------|----------------------------------|
| SELM = LED Emergency Light | M = Sheet Metal | 60 = 60 Feet | R10 = 10 Watts  | SD = Self Diagnostics (Standard) |

Emergency Egress Coverage; fixture spacing

| Catalog Number | Output Lumens | 0.1fc minimum  |                | 1fc minimum    |                |
|----------------|---------------|----------------|----------------|----------------|----------------|
|                |               | 75 foot height | 20 foot height | 75 foot height | 20 foot height |
| SELM25         | 108           | 25 feet        | 12 feet        | 14 feet        | 12 feet        |
| SELM50         | 218           | 50 feet        | 30 feet        | 21 feet        | 20 feet        |
| SELM60         | 309           | 60 feet        | 52 feet        | 24 feet        | 30 feet        |

## TECHNICAL DATA

### Remote Capacity

The SELM series offers 10 watts to 16 watts of remote capacity. This remote capacity can be used to power LED remotes with up to 193 feet of emergency coverage with 6V output voltage. The remotes are available in plastic (SRP series) and metal (SRM series) and are UL listed for wet location with a temperature rating from -30 °C to 60 °C. This additional capacity can also be used to extend the operation time of the 2 onboard heads.

### LED Heads

Metal-formed aluminum lamp heads with die-cast metal and 3D swivel assembly permits aiming adjustment from 80 ° vertical and 358 ° rotation. The placement is secured with a lockable pivot mounted on a rotating base ring.  
 SEL25 = 100 lumens  
 SEL50 = 200 lumens  
 SEL60 = 300 lumens

### EZ Key External Power Disconnect

Prevents the battery from cycling during the construction phase and ensures battery is not drained from power cycling.

### EZ Hang Mounting Feature

The hands-free EZ Hang feature allows the installer to hang the emergency light face from the back plate in order to easily and efficiently make the power connections.

### Self Diagnostics

The self-diagnostic software automatically performs all tests required by UL924, and NFPA101. The software systematically calibrates itself in the field, reducing installation labor and eliminating manual calibration errors. The system indicates the status of the emergency light at all times using the LED indicator. A 90-minute battery power (emergency mode) simulation test occurs once every 12 months. A 30-second battery power simulation test occurs every 30 days. The solid-state microprocessor based system detects and warns of system failures, and incorporates all standard electronic features.

### Low Voltage Disconnect

The low-voltage circuitry disconnects the lighting load to protect the battery during run times in excess of the 90-minute UL limit. The disconnect remains in effect until normal utility power is restored, preventing deep battery discharge.

### Brownout Circuit

The brownout circuit on the SELM emergency light monitors the flow of AC current to the unit and activates the emergency light heads when a predetermined reduction of AC power occurs.

### Laser Test


The laser test includes a laser pointer testing capability. Activation of the photocell test button with a laser pointer will simulate loss of AC power and engage the emergency operation of the exit and emergency heads.

### Warranty

The SELM series is backed by a five-year warranty on the fixtures and a seven-year prorated battery warranty.



EZ Key



EZ Hang



Laser tester

Part Number = LASER  
(sold separately)

REMOTE CAPACITY

| SELM Series Remotes |                        |  |   |   |   |   |   |   |
|---------------------|------------------------|--|---|---|---|---|---|---|
| Watts Consumed      |                        | SRPA                                   | Single Head Remotes                       |   |   | Double Head Remotes                           |   |   |
|                     |                        | SRPA29                                 | SRP/SRM13                                 | SRP/SRM25                                 | SRP/SRM30                                 | SRP25D/SRM25D                                 | SRP50D/SRM50D                                 | SRP60D/SRM60D                                 |
|                     |                        | 3.5                                    | 1.25                                      | 2.5                                       | 4.1                                       | 2.5   | 5   | 8.2   |
| Catalog Number      | Remote Watts Available | # of SRPA29 remotes fixture will power | # of SRP/SRM13 remotes fixture will power | # of SRP/SRM25 remotes fixture will power | # of SRP/SRM30 remotes fixture will power | # of SRP25D/SRM25D remotes fixture will power | # of SRP50D/SRM50D remotes fixture will power | # of SRP60D/SRM60D remotes fixture will power |
| SELM25R16SD         | 16                     | 4                                      | 12  | 6   | 3   | 6   | 3   | 1   |
| SELM50R14SD         | 14                     | 4                                      | 11  | 5   | 3   | 5   | 2   | 1   |
| SELM60R10SD         | 10                     | 2                                      | 8   | 4   | 2   | 4   | 2   | 1   |



SRP



SRPD



SRM



SRMD



SRPA WHITE



SRPA BLACK




SRPA BRONZE




SRPA SILVER

PHOTOMETRY

SELM25

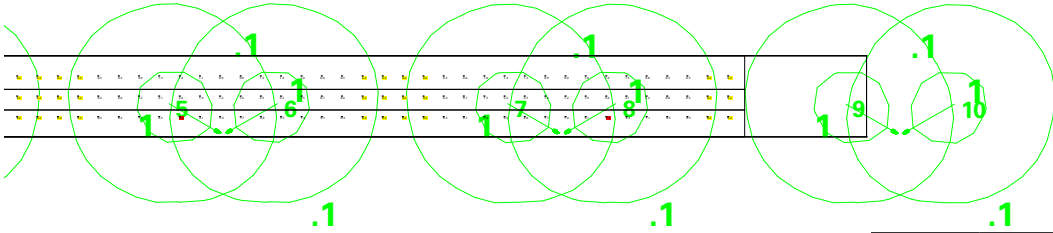


25ft

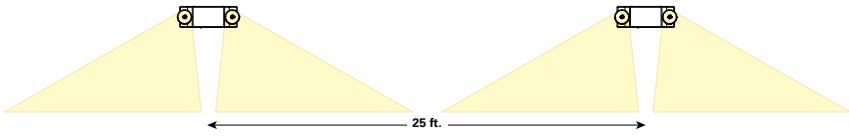


| X     | Y     | Z   | Orient | Tilt |
|-------|-------|-----|--------|------|
| -0.5  | 0.25  | 7.5 | 125    | 27   |
| 0.5   | 0.25  | 7.5 | 55     | 27   |
| 16.5  | 0.211 | 7.5 | 125    | 27   |
| 17.5  | 0.212 | 7.5 | 55     | 27   |
| 33.5  | 0.172 | 7.5 | 125    | 27   |
| 34.5  | 0.173 | 7.5 | 55     | 27   |
| 50.5  | 0.132 | 7.5 | 125    | 27   |
| 51.5  | 0.135 | 7.5 | 55     | 27   |
| 67.5  | 0.093 | 7.5 | 125    | 27   |
| 68.5  | 0.096 | 7.5 | 55     | 27   |
| 84.5  | 0.054 | 7.5 | 125    | 27   |
| 85.5  | 0.058 | 7.5 | 55     | 27   |
| 101.5 | 0.015 | 7.5 | 125    | 27   |
| 102.5 | 0.019 | 7.5 | 55     | 27   |

\*\*\*The "Rule of Thumb" spacing guidelines are designed to achieve 1 foot-candle average and 0.1 foot-candle minimum with a 40:1 maximum/minimum ratio. The corridor used is 100 feet long, 9 foot ceiling with a 6 foot wide walkway and 3 foot path of egress. The reflectances are 80% ceiling, 50% walls and 20% floors. The fixture mounting height is 7.5 feet. Cooper Lighting Solutions assumes no responsibility for local requirements or specific project variables. This guideline is used as a design aid, not as a guarantee of any code compliance.

SELM50

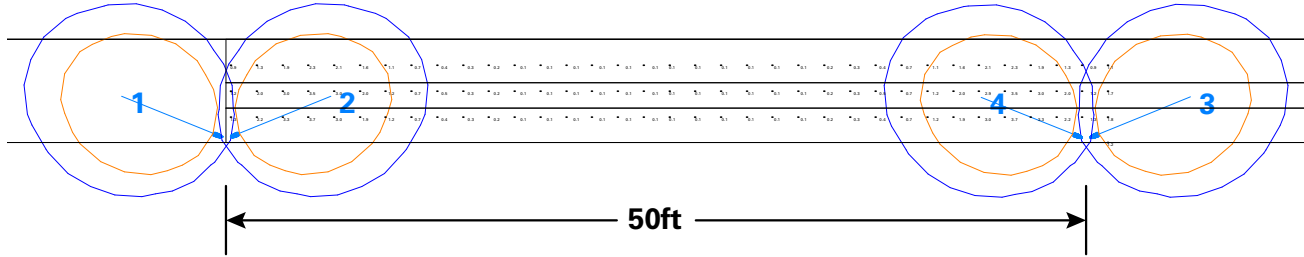


50ft

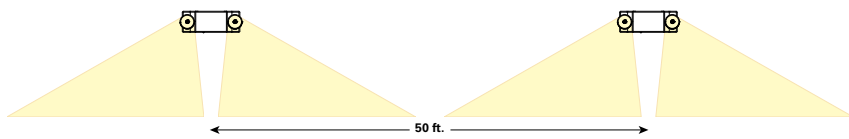


| X     | Y     | Z   | Orient | Tilt |
|-------|-------|-----|--------|------|
| 24.25 | 0.33  | 7.5 | 158    | 40   |
| 24.75 | 0.33  | 7.5 | 22     | 40   |
| 74.75 | 0.3   | 7.5 | 22     | 40   |
| 74.25 | 0.292 | 7.5 | 158    | 40   |

SELM60

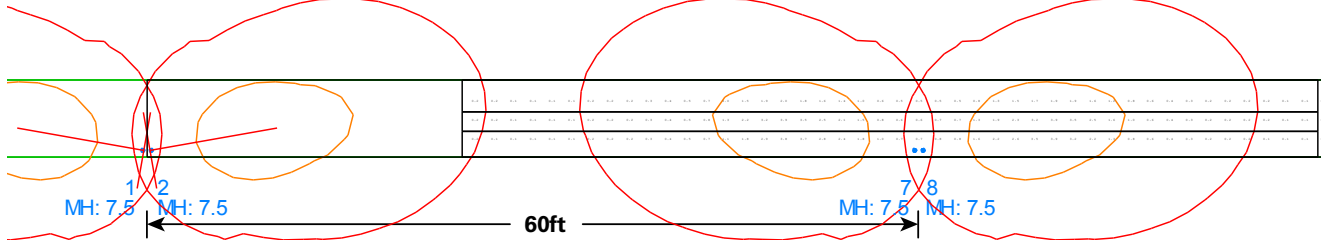

60ft

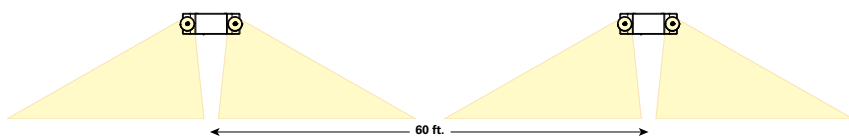

| X      | Y   | Z   | Orient | Tilt |
|--------|-----|-----|--------|------|
| -0.25  | 0.5 | 7.5 | 170    | 57   |
| 0.25   | 0.5 | 7.5 | 10     | 57   |
| 120.25 | 0.5 | 7.5 | 10     | 57   |
| 119.75 | 0.5 | 7.5 | 170    | 57   |
| 59.75  | 0.5 | 7.5 | 170    | 57   |
| 60.25  | 0.5 | 7.5 | 10     | 57   |
| 180.25 | 0.5 | 7.5 | 10     | 57   |
| 179.75 | 0.5 | 7.5 | 170    | 57   |

## SELF-DIAGNOSTIC TESTING OPERATIONS

The AtLite self-diagnostics is continuously monitoring your emergency fixture, and will signal any failure through the 3 color indicator LED.

### Initial Operation:

When the unit is first powered up it will go into a 24-hour fast charge and the indicator LED will pulse green. Once the unit has fully charged it will perform a self calibration. After self calibration, the LED will change to steady green indicating the unit is fully charged and float charging the battery to maintain readiness.

### Automatic Testing:

The unit will perform a battery capacity, lamp/LED, and charge circuit test every 30 days for 30-seconds. During this time, the indicator LED will change to a steady yellow. It will perform a full battery capacity (90-minute) test once per year. During this time, the indicator LED will change to a blinking yellow.

### Manual Testing:

- 10-Second Installation Test – Press and release the test button once during fast charge (blinking green) to initiate a 10-second quick test. The sign will switch to emergency mode for 10-seconds allowing the installer to verify proper installation of the unit, and the LED indicator will turn solid yellow
- 30-Second Test – Press and release the test button once during float charge (steady green). The indicator LED will turn steady yellow to indicate the unit is performing a 30-second test of the batteries and lamps/LEDs
- 90-Minute Test – Press and release the test button a second time during a 30-second test (steady yellow) to change to a 90-minute test. During this test, the LED indicator will change to blinking yellow, and the circuit will perform a full battery capacity, charge circuit, and LED test
- Canceling Test – Press and release the test button during the 90-minute test (flashing yellow) to return the fixture to its original state (fast charge or float charge)

### Laser Test:

The SEL SD products are equipped with a Laser Test function that allows the unit to be manually tested without the need to physically press the test button. Shining a laser pointer in the hole marked "LASER TEST" on the bottom of the unit has the same effect as a press and release of the test button.

### Clearing Failure Codes:

- A battery failure (LED two blink red) can be cleared by replacing the battery. Disconnecting the battery and AC power, or performing a full 90-minute discharge will reset the error code, however, it will return if the battery is faulty
- Charge Circuit (LED three blink red) and lamp/LED failure (LED four blink red) will clear when the unit successfully passes a manual or automatic 30-second test

### Indicators:

- LED Off - No power to unit, emergency mode
- LED Steady Green - Unit is fully charged and is float charging the battery to maintain readiness
- LED Green Pulse - Unit is in a 24-hour fast charge of the battery
- LED Two Blink Red - Battery has failed a capacity test, or the battery is disconnected. See "Clearing Failure Codes" above
- LED Three Blink Red - Battery charge circuit has failed. See "Clearing Failure Codes" above
- LED Four Blink Red - Lamps have burned out, or on an EXIT/Combo, 50% or more of the LEDs have failed. See "Clearing Failure Codes" above
- LED Steady Yellow - 30-second test or 10-second quick test (Fast Charge only)
- LED Blinking Yellow - 90-minute test

### Maintenance:

None required. Replace the batteries as needed according to ambient conditions. However, we recommend that the equipment be tested regularly in accordance with local codes.

