



# INSTALLATION INSTRUCTIONS

ANY ISSUES WITH INSTALLATION REQUIRES IMMEDIATE CALLS TO SHAPER

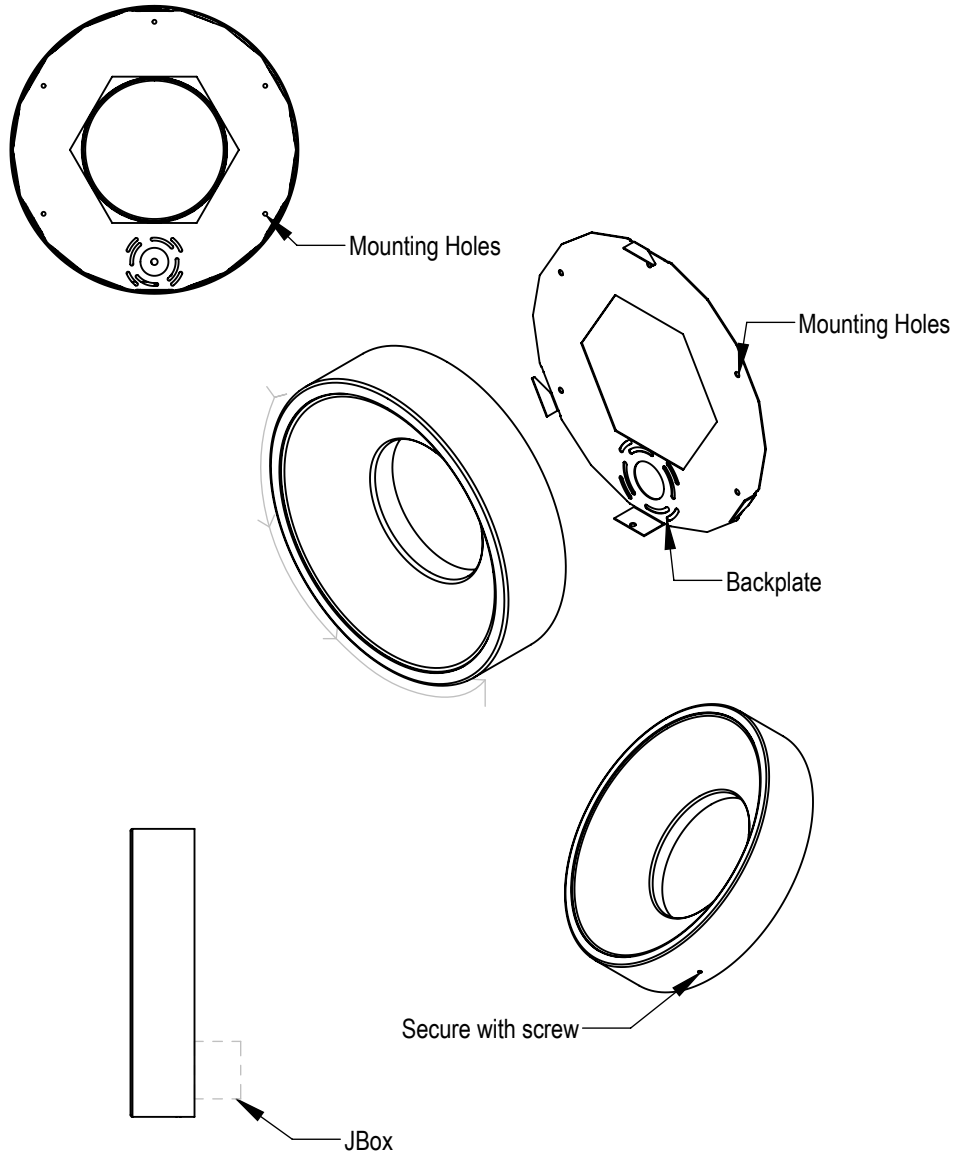

## NOTICE:

- For proper installation, have a qualified electrician install this product.
- Before installation of any luminaire onto an electrical junction box, be sure to disconnect power.
- This luminaire must be wired and grounded in accordance with the National Electrical Code, local codes, and ordinances.
- Wire supply connections must be made with U.L. approved connectors.
- Check that luminaire voltage and building voltage are the same.



865 Sconce

## CAUTION:

EXERCISE SPECIAL CARE AND SAFETY WHILE INSTALLING AND SERVICING LUMINAIRE. USE OF SOFT GLOVES AND PADDED MATERIALS ARE RECOMMENDED DURING HANDLING TO AVOID MARRING THE FINISH. FABRIC COMPONENTS MAY BE VACUUMED WITH CAUTION, AND ALL OTHER COMPONENTS MAY BE CLEANED WITH SOFT DAMP OR DRY CLOTH.

## INSTRUCTIONS:

1. Locate junction box.
2. Make sure power is off.
3. Attach Backplate to J-box with mounting screws provided. Use mounting holes to fasten backplate to the wall using blocking as needed.
4. Using U.L. approved wire connectors: connect the neutral (white) wire to the supply neutral, connect the luminaire line wire (black) to the supply line wire, connect the ground (green) wire to the supply ground.
5. Install fixture over returns, ensure set screw hole aligns properly.
6. With fixture rotated slightly counter clockwise from center install over backplate and rotate clockwise until secure.
7. Secure fixture in place with screw provided